



Portable Power Station

Fan Cooling / Realtime Power Level Color Display



Apower 1000



Apower 2000

Apower 1000/Apower 2000



Universal



US / JP



AU



UK



EU

Features:

- 2~4*AC 100-230V
- 2*DC5525 & 1*cigarlighter 12V18A
- 1*Cigar Lighter 12V/20A
- 2*Type-C (100W/22.5W)
- 4*USB-A QC3.0 18W
- AC Output Port: Universal / US / JP / AU / UK / EU
- 1 Year Warranty
- Support UPS Function
- Bi-directional Inverter Technology
- Intelligent Fast Charging 1hr/2hrs
- Wi-Fi & Bluetooth Smart Control (Available on customized version)
- LiFePo4 High Capacity Battery
- Built-in MPPT Controller & BMS
- Hidden AC Outputs Interface To Ensure Safety
- Real-time Power Level Color Display
- CE \ ROHS \ UN38.3



Parameter:

Model		Apower1000	Apower2000
Built-in Battery		High Quality LiFePo4 1024Wh (320000mAh/3.2V)	High Quality LiFePo4 2048Wh (640000mAh/3.2V)
Input Charging Port		XT60	
Input Charging Parameters	Mains Charging	110V/220V(1000W)/1.2H	110V/220V(1000W)/2.5H
	Solar Panel Input	12~48V DC Max 500W	12~48V DC Max 500W
	Car Input Charging	12~24V DC	
AC Output	Output Waveform	Pure Sine Wave	
	Output Rated Voltage	100~120V AC, 220~240V AC	
	Output Rated Frequency	50Hz / 60Hz $\pm$ 3Hz	
	Rated Output Power	1600W(110V)/1800W(220V)	2400W(110V)/2600W(220V)
DC Output	2*DC	Total 12V18A / 200W Max (DC5525) Shared With Cigar Lighter	
	1*Cigar Lighter	Total 12V18A / 200W Max Shared With 2*DC5525	
USB Output	USB-A Port	4*USB-A QC3.0 18W	
	Type-C Port	2*Type-C (100W / 22.5W)	
Bulb Type		LED (Low, High, SOS, Flash Mode)	
Display		LCD Display	
Cooling Method		Fan Cooling	
Operation Temperature		Charging : 0°C ~ 45°C Discharge: -10° ~ 50°C	
Inverter Efficiency (70% Load)		> 90%	
Multi-protections		Discharging current 60A	Discharging current 90A
		Short-circuit Protection Over-current Protection Over-charge Protection Over-discharge Protection SOC Calculation Temperature Protection	
Product Size (mm)		447*234*239 mm	483*301*301 mm
Product Weight (kg)		13.5kg	23kg
Accessories		1*AC Charging Cable 1*Solar Cable 1*Car Charging Cable 1*User Manual	


Details:



1. Hi-def liquid crystal display



2. LED light




3. QC3.0 quick charge



4. Type-C, PD 100W fast charge



Dimensions (Unit: mm)

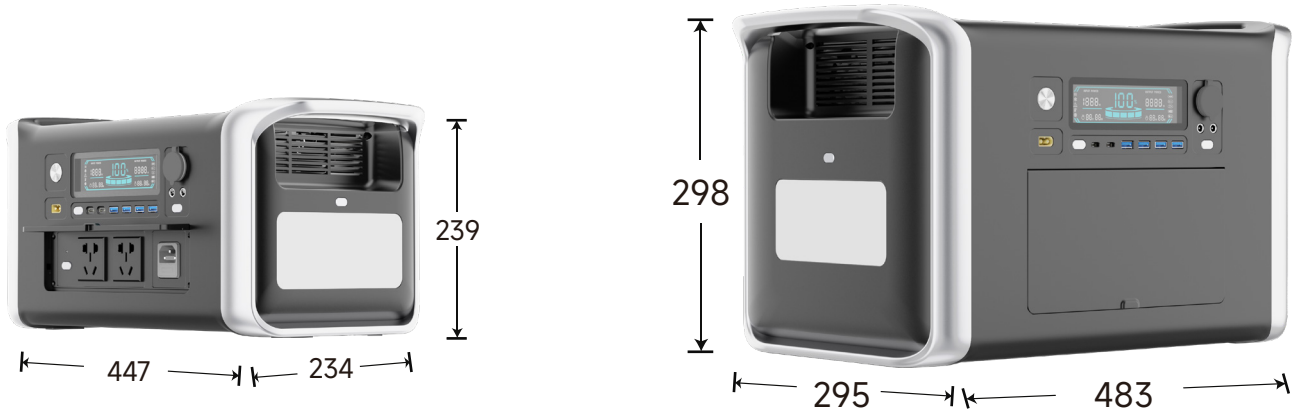

Support Device:



Smart Phone



Tablet



Laptop



Projector



Drone



Car Refrigerators



Camera



Electric Fan

Packaging Information:

Apower1000	Apower2000
-N.W: 13.5kg	-N.W: 23kg
-G.W: 16kg	-G.W: 27.5kg
-Inner box size: 495x285x292 mm	-Inner box size: 563x370x400 mm
Outer box size: 513x303x309 mm	Outer box size: 620X387X460 mm
-HS code: 8507600090	-HS code: 8507600090